



## CERTIFIED SOLAR SYSTEM

SUPPLIER:  
**Viessmann Manufacturing Company (US) Inc.**  
45 Access Road  
Warwick, RI 02886 USA  
www.viessmann-us.com


In Accordance with:  
**SRCC OG-300-2008-06**

BRAND: VITOSOL 200F COMBI-PACKAGE  
MODEL: 3-200F-450B-G  
SYSTEM TYPE: Pumped, Indirect  
CERTIFICATION #: 2007030B  
Original Certification: March 24, 2010  
Expiration Date: July 06, 2018

The solar system listed below has been evaluated by the Solar Rating & Certification Corporation™ (SRCC™), an ANSI accredited and EPA recognized Certification Body, in accordance with SRCC OG-300, Operating Guidelines for Certifying Solar Water Heating Systems, and has been certified by the SRCC. This award of certification is subject to all terms and conditions of the Program Agreement and the documents incorporated therein by reference. This document must be reproduced in its entirety.

Description: Glazed Flat Plate, Differential, -35 °C -31 °F, GRAS, None, Boiler, Fluid, Tank high limit

Single-day Rating		SINGLE DAY RATING CONDITIONS	SI Units	Inch-Pound Units
Solar Energy Factor (SEF <sub>D</sub> )	Solar Fraction (SF <sub>D</sub> )	System Set Temperature	57.2 °C	135 °F
16.3	0.96	Environmental Temperature	19.7 °C	67.5 °F
Single-day Rating Conditions: SEF <sub>D</sub> = Solar Energy Factor (info link) SF <sub>D</sub> = Solar Fraction (info link)		Ambient Temperature Profile Average	14.4 °C	58 °F
		Water Mains Temperature	14.4 °C	58 °F
		Delivered Load	43.3 MJ/day	41,045 Btu/day
		Solar Irradiance	4,733 Wh/m <sup>2</sup> -day	1,500 Btu/ft <sup>2</sup> -day

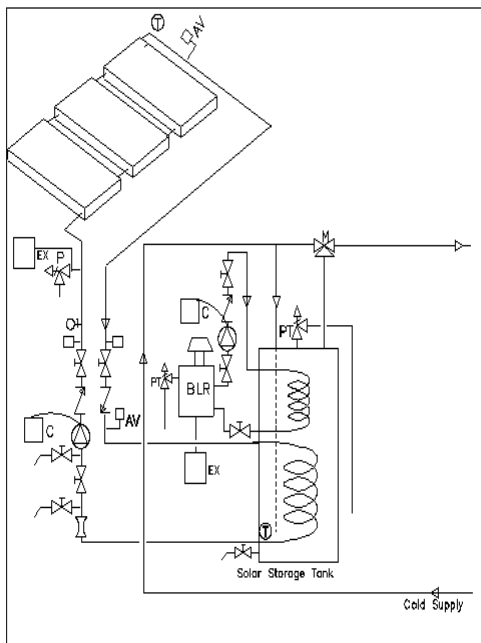

Storage Tank(s)	
Solar Tank Vol (l)	Solar Tank Vol (gal)
454	120
Approximate Collector Area: 7.6 m <sup>2</sup> , 81.5 ft <sup>2</sup>	

The solar water system listed here has been certified by the SRCC as meeting the minimum standards for testing, installation, operation, maintenance, performance, reliability and safety as specified in SRCC Document OG-300. Thermal performance ratings are based on the successful durability and performance testing of a sample collector, where said tests have been conducted by an independent laboratory approved and listed by the SRCC. The system has been modeled using the computer simulation program TRNSYS to calculate the ratings.

Before the Supplier can make any change in design, materials, specifications, parts, or construction, the change(s) must be reported to the SRCC for evaluation of continued certification.

REMARKS:

*Jim Higgins*

Technical Director



Print Date: June, 2014 Page 1 of 2  
© Solar Rating & Certification Corporation™

www.solar-rating.org ♦ 400 High Point Drive, Suite 400 ♦ Cocoa, Florida 32926 ♦ (321) 213-6037 ♦ Fax (321) 821-0910



## CERTIFIED SOLAR SYSTEM

SUPPLIER:  
**Viessmann Manufacturing Company (US) Inc.**  
45 Access Road  
Warwick, RI 02886 USA  
www.viessmann-us.com  
In Accordance with:  
**SRCC OG-300-2008-06**

BRAND: VITOSOL 200F COMBI-PACKAGE  
MODEL: 3-200F-450B-G  
SYSTEM TYPE: Pumped, Indirect  
CERTIFICATION #: 2007030B  
Original Certification: March 24, 2010  
Expiration Date: July 06, 2018

The solar system listed below has been evaluated by the Solar Rating & Certification Corporation™ (SRCC™), an ANSI accredited and EPA recognized Certification Body, in accordance with SRCC OG-300, Operating Guidelines for Certifying Solar Water Heating Systems, and has been certified by the SRCC. This award of certification is subject to all terms and conditions of the Program Agreement and the documents incorporated therein by reference. This document must be reproduced in its entirety.

Only the following options for the collector array are approved:

Option	Collector Panel Manufacturer	Collector Panel Request Number	Collector Panel Model Number	Collector Panel Name	Quantity	Total Panel area(m²)	Total Panel area(ft²)
1	Viessmann Manufacturing Company (US) Inc.	2005019A	200-F, SV2/SH2	Vitosol	3	7.57	81.47

