

CERTIFIED SOLAR SYSTEM

SUPPLIER:

Viessmann Manufacturing Company (US) Inc.

45 Access Road Warwick, RI 02886 USA www.viessmann-us.com

In Accordance with: SRCC OG-300-2008-06 BRAND: VITOSOL 200F COMBI-

PACKAGE

MODEL: 2-200F-300B-G SYSTEM TYPE: Pumped, Indirect

CERTIFICATION #: 2007030A

Original Certification: March 24, 2010

Expiration Date: July 06, 2018


The solar system listed below has been evaluated by the Solar Rating & Certification Corporation™ (SRCC™), an ANSI accredited and EPA recognized Certification Body, in accordance with SRCC OG-300, Operating Guidelines for Certifying Solar Water Heating Systems, and has been certified by the SRCC. This award of certification is subject to all terms and conditions of the Program Agreement and the documents incorporated therein by reference. This document must be reproduced in its entirety.

Description: Glazed Flat Plate, Differential, -35 °C -31 °F, GRAS, None, Boiler, Fluid, Tank high limit

| Single-day Rating | | | | | |
|---------------------|--------------------|--|--|--|--|
| Solar Energy Factor | Solar Fraction | | | | |
| (SEF _D) | (SF _D) | | | | |
| 4.3 | 0.86 | | | | |

Single-day Rating Conditions: SEF_D = Solar Energy Factor (info link) SF_D = Solar Fraction (info link)

| SINGLE DAY RATING CONDITIONS | SI Units | Inch-Pound Units | |
|-------------------------------------|------------------------------|--------------------------------|--|
| System Set Temperature | 57.2 °C | 135 °F | |
| Environmental Temperature | 19.7 °C | 67.5 °F | |
| Ambient Temperature Profile Average | 14.4 °C | 58 °F | |
| Water Mains Temperature | 14.4 °C | 58 °F | |
| Delivered Load | 43.3 MJ/day | 41,045 Btu/day | |
| Solar Irradiance | 4,733 Wh/m ² -day | 1,500 Btu/ft ² -day | |

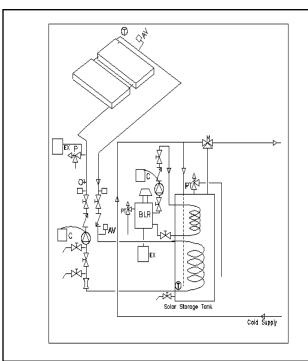

| Storage Tank(s) | | | | |
|--|----------------------|--|--|--|
| Solar Tank Vol (I) | Solar Tank Vol (gal) | | | |
| 299 | 79 | | | |
| Approximate Collector Area: 5.0 m², 54.3 ft² | | | | |


The solar water system listed here has been certified by the SRCC as meeting the minimum standards for testing, installation, operation, maintenance, performance, reliability and safety as specified in SRCC Document OG-300. Thermal performance ratings are based on the successful durability and performance testing of a sample collector, where said tests have been conducted by an independent laboratory approved and listed by the SRCC. The system has been modeled using the computer simulation program TRNSYS to calculate the ratings.

Before the Supplier can make any change in design, materials, specifications, parts, or construction, the change(s) must be reported to the SRCC for evaluation of continued certification.

REMARKS:









SUPPLIER:

Viessmann Manufacturing Company (US) Inc.

45 Access Road Warwick, RI 02886 USA www.viessmann-us.com In Accordance with:

SRCC OG-300-2008-06

VITOSOL 200F COMBI-BRAND:

PACKAGE

2-200F-300B-G MODEL: SYSTEM TYPE: Pumped, Indirect

CERTIFICATION #: 2007030A

Original Certification: March 24, 2010 **Expiration Date:** July 06, 2018

The solar system listed below has been evaluated by the Solar Rating & Certification Corporation™ (SRCC™), an ANSI accredited and EPA recognized Certification Body, in accordance with SRCC OG-300, Operating Guidelines for Certifying Solar Water Heating Systems, and has been certified by the SRCC. This award of certification is subject to all terms and conditions of the Program Agreement and the documents incorporated therein by reference. This document must be reproduced in its entirety.

Only the following options for the collector array are approved:

| Option | Collector Panel Manufacturer | Collector Panel Request Number | Collector Panel Model Number | Collector Panel Name | Quantity | Total Panel area(m²) | Total Panel area(ft²) |
|--------|--|--------------------------------------|---------------------------------|-------------------------|----------|-------------------------|--------------------------|
| 1 | Viessmann Manufacturing Company (US) Inc. | 2005019A | 200-F, SV2/SH2 | Vitosol | 2 | 5.05 | 54.31 |

