


1 2 3

A

A

B

B

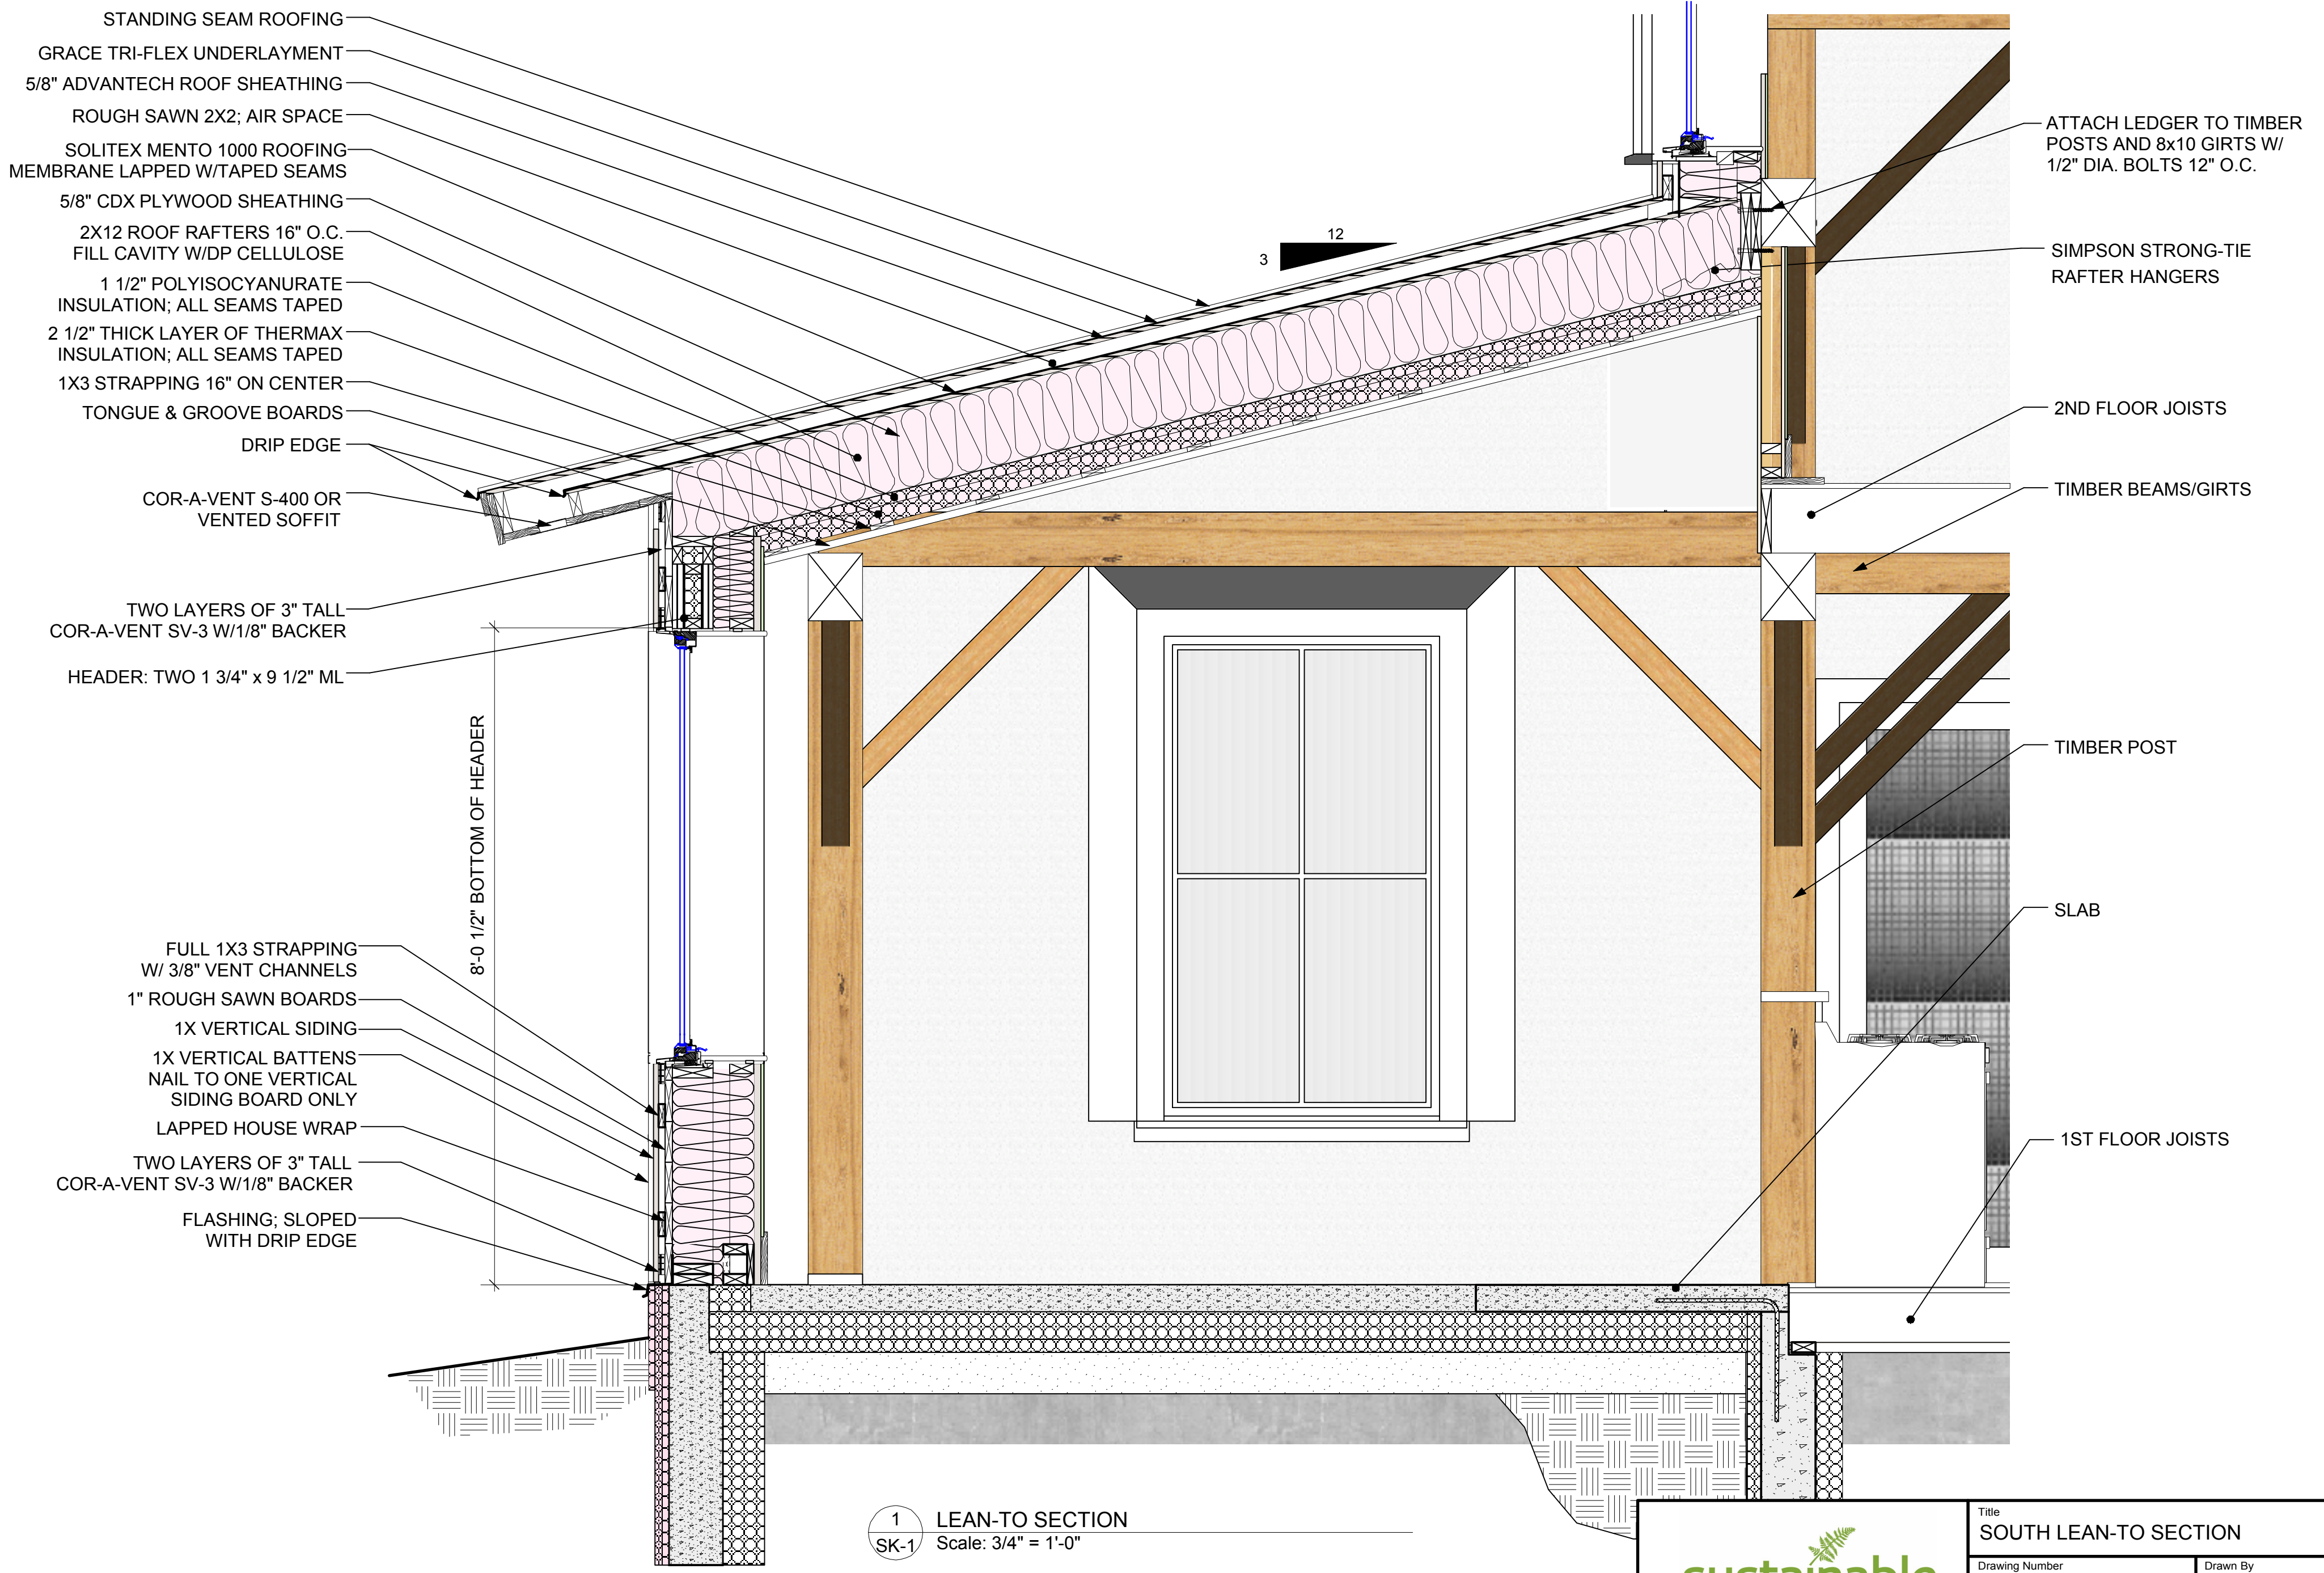

- STANDING SEAM ROOFING
- GRACE TRI-FLEX UNDERLAYMENT
- 5/8" ADVANTECH ROOF SHEATHING
- ROUGH SAWN 2X2; AIR SPACE
- SOLITEX MENTO 1000 ROOFING MEMBRANE LAPPED W/TAPED SEAMS
- 5/8" CDX PLYWOOD SHEATHING
- 2X12 ROOF RAFTERS 16" O.C. FILL CAVITY W/DP CELLULOSE
- 1 1/2" POLYISOCYANURATE INSULATION; ALL SEAMS TAPED
- 2 1/2" THICK LAYER OF THERMAX INSULATION; ALL SEAMS TAPED
- 1X3 STRAPPING 16" ON CENTER
- TONGUE & GROOVE BOARDS
- DRIP EDGE

- COR-A-VENT S-400 OR VENTED SOFFIT
- TWO LAYERS OF 3" TALL COR-A-VENT SV-3 W/1/8" BACKER
- HEADER: TWO 1 3/4" x 9 1/2" ML

- FULL 1X3 STRAPPING W/ 3/8" VENT CHANNELS
- 1" ROUGH SAWN BOARDS
- 1X VERTICAL SIDING
- 1X VERTICAL BATTENS NAIL TO ONE VERTICAL SIDING BOARD ONLY
- LAPPED HOUSE WRAP
- TWO LAYERS OF 3" TALL COR-A-VENT SV-3 W/1/8" BACKER
- FLASHING; SLOPED WITH DRIP EDGE

- ATTACH LEDGER TO TIMBER POSTS AND 8x10 GIRTS W/ 1/2" DIA. BOLTS 12" O.C.

- SIMPSON STRONG-TIE RAFTER HANGERS

- 2ND FLOOR JOISTS

- TIMBER BEAMS/GIRTS

- TIMBER POST

- SLAB

- 1ST FLOOR JOISTS

8'-0 1/2" BOTTOM OF HEADER

12
3

1 LEAN-TO SECTION
SK-1 Scale: 3/4" = 1'-0"

			Title SOUTH LEAN-TO SECTION		
			Drawing Number SK-1	Drawn By APB	Date 9/19/15
			CAD File Name wrenwood 8-25-15.vmx		

1 2 3