

# System 9RLFCD Submittal

**AOU9RLFC, ARU9RLF**

## Compact Duct

Job Name: \_\_\_\_\_ Approval: \_\_\_\_\_ Date: \_\_\_\_\_  
 Location: \_\_\_\_\_ Construction: \_\_\_\_\_  
 Engineer: \_\_\_\_\_ Unit #: \_\_\_\_\_  
 Submitted to: \_\_\_\_\_ Drawing #: \_\_\_\_\_  
 Submitted by: \_\_\_\_\_ Reference: \_\_\_\_\_



**Outdoor Unit Power** 208-230/VAC-1Ph-60Hz  
 Available Voltage Range 187-253VAC  
 Fuse Size, Max. 15A  
 MCA 13.4A

**Compressor** Inverter Driven Variable Speed DC Rotary  
 No. used 1  
 Output 850W  
 Lubrican Oil POE (RB68)

**Fan type** Propeller  
 Motor Output 115W  
 Airflow Rate Cooling/Heating (High) 794 / 989CFM

**Refrigerant** 410A  
 Outdoor Unit 2lbs 10oz  
 Control Electronic Expansion Valve  
 O.D. Discharge (in) 1/4"(Flare)  
 O.D. Suction (in) 3/8"(Flare)

**Dimensions** H x W x D  
 Uncrated (in) 24-1/2 x 31-3/32 x 11-11/32  
 (mm) (620 x 790 x 290)  
 Crated (in) 28-1/16 x 37-7/32 x 15-9/16  
 (mm) (713 x 945 x 395)


**Weight** Outdoor  
 Net 84lbs (38kg)  
 Gross Shipping 93lbs (42kg)

**Cooling**  
 Rated Capacity 9,000BTU/h  
 Min-Max Capacity 3,100~12,000BTU/h  
 Rated Power Input 0.62kw  
 Max. Power Input 1.40kw  
 SEER 21.5  
 Outdoor Sound Rating 48dB

**Heating**  
 Rated Capacity 12,000BTU/h  
 Min-Max Capacity 3,100~18,000BTU/h  
 Rated Power Input 0.85kw  
 Max. Power Input 1.80kw  
 HSPF 12.2  
 Outdoor Sound Rating 49dB

**Piping Lengths**  
 Max. Piping Length (Total) 66ft  
 Max. Pipe Height Difference 49ft  
 Connection method (Flared)

**Operating Range**  
 Cooling 14°F~115°F DB  
 Heating -5°F~75°F DB


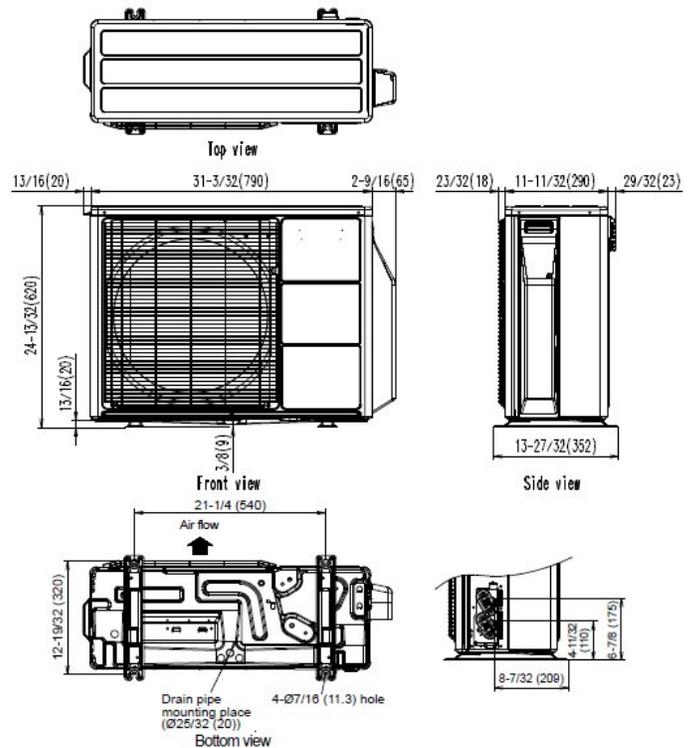


Fujitsu General America, Inc.  
 Fairfield, NJ 07004  
 Toll Free: 1-888-888-3424  
 Fax: (973) 836-0447  
 www.fujitsugeneral.com

Fujitsu products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations.



<b>Power</b>	V/Hz/P	230/60/1	<b>Cooling Capacity</b>	(BTU/h)	9,000
<b>Fan type</b>		Sirocco	<b>Moisture Removal</b>	pt/h (l/h)	1.5 (0.7)
No. Motors	(W)	2 (81)	<b>Heating Capacity</b>	(BTU/h)	12,000
CFM [ .10 in.WG]	(Hi,Me,Lo,Qu)	353/324/294/265	<b>Temperature Setting Range</b>		
Sound Pressure Level	db (Hi,Me,Lo,Qu)	28/27/26/25	Cooling	°F(°C)	64~90 (18~32)
F.L. A.	(A)	.32	Heating	°F(°C)	60~88 (16~31)
<b>Refrigerant</b>		410A	<b>Drain Pipe Size**</b>	OD in	Ø1-1/16
O.D. Discharge	in (mm)	Ø1/4" (6.35)		ID in	Ø3/4
O.D. Suction	in (mm)	Ø3/8" (9.52)	<b>Remote Control Type</b>		Wired
<b>Dimensions</b>		H x W x D	<b>Electrical Connection*</b>	AWG	14/3 with ground
Uncrated	(in)	7-25/32 × 27-9/16 × 24-13/32			
	(mm)	(198 × 700 × 620)			
Crated	(in)	10-7/8 × 38-1/8 × 29-3/4			
	(mm)	(276 × 968 × 756)			
<b>Weight</b>					
Net	lbs. (kg)	41 (19)			
Gross Shipping	lbs. (kg)	55 (25)			

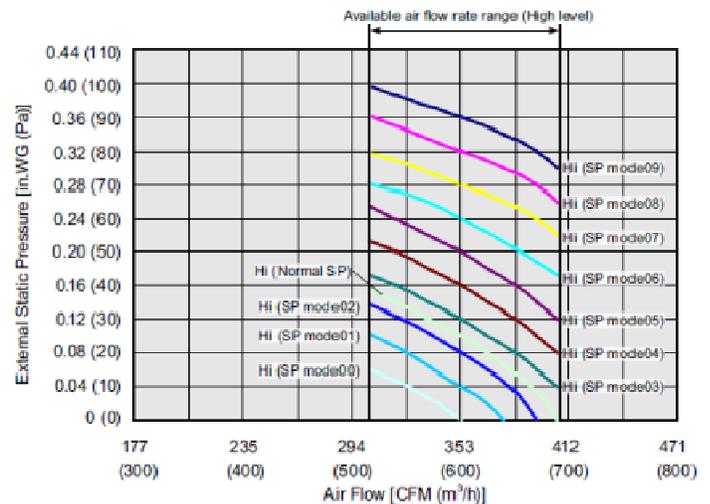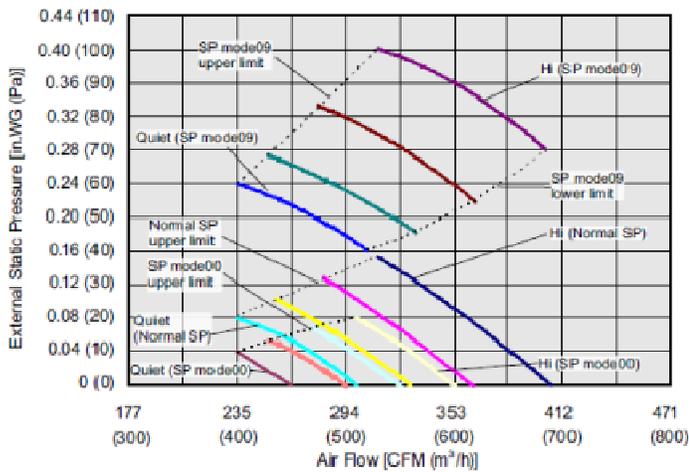

**Note:**

Specifications are based on the following conditions.

Power source of specifications : 230V

Cooling: Indoor temperature of 80°F(26.67°C)DB / 67°F(19.44°C)WB, and outdoor temperature of 95°F(35°C)DB/75°F(23.89°C)WB.

Heating: Indoor temperature of 70°F(21.11°C)DB / 60°F(15.56°C)WB, and outdoor temperature of 47°F(8.33°C)DB/43°F(6.11°C)WB.

Standard Static Pressure: 0.10in.WG (25Pa)

Pipe length : 16.4ft. (5m) [Outdoor unit - Branch box], 9.8ft. (3m) [Branch box - Indoor unit]

Height difference : 0 ft.(0m) [Outdoor unit - Indoor unit]

Fujitsu General America, Inc.  
 Fairfield, NJ 07004  
 Toll Free: 1-888-888-3424  
 Fax: (973) 836-0447  
 www.fujitsugeneral.com

Fujitsu products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations.

