


NOTE:
 WINDOW AND DOOR SIZES ARE SUGGESTED SIZES ONLY. OWNER
 TO CONFIRM FINAL SIZES WITH WINDOW MANUFACTURER
 BEFORE COMMENCING CONSTRUCTION.

- NOTES:**
1. DO NOT SCALE FROM PRINT.
 2. CONTRACTOR TO CHECK & VERIFY DRAWINGS, & TO REPORT ANY DISCREPANCIES TO OWNER BEFORE PROCEEDING WITH ANY WORK.
 3. CONCRETE COMPRESSIVE STRENGTH TO BE 30MPa AT 28 DAYS.
 4. CONCRETE SHALL BE CAST TO MEET THE REQUIREMENTS TO MEET LATEST EDITION OF THE C.S.A. STANDARD A231 & A232.
 5. FOOTINGS TO REST ON UNDISTURBED SOIL HAVING AN ALLOWABLE BEARING CAPACITY OF 200 kPa.
 6. BACKFILLING OPERATIONS TO BE COMPLETED BEFORE COMMENCING CONSTRUCTION TO MEET LATEST STANDARD OF THE NATIONAL BUILDING CODE OF CANADA, DIVISION 5.
 7. METHODS OF CONSTRUCTION TO MEET LATEST STANDARD OF THE NATIONAL BUILDING CODE OF CANADA, DIVISION 5.
 8. DESIGNER HAS VISITED THE SITE AND HAS BEEN MADE AWARE AND CHECKED - THE DESIGNERS HOLD ABSOLUTELY NO RESPONSIBILITY OR LIABILITY OF ANY KIND.

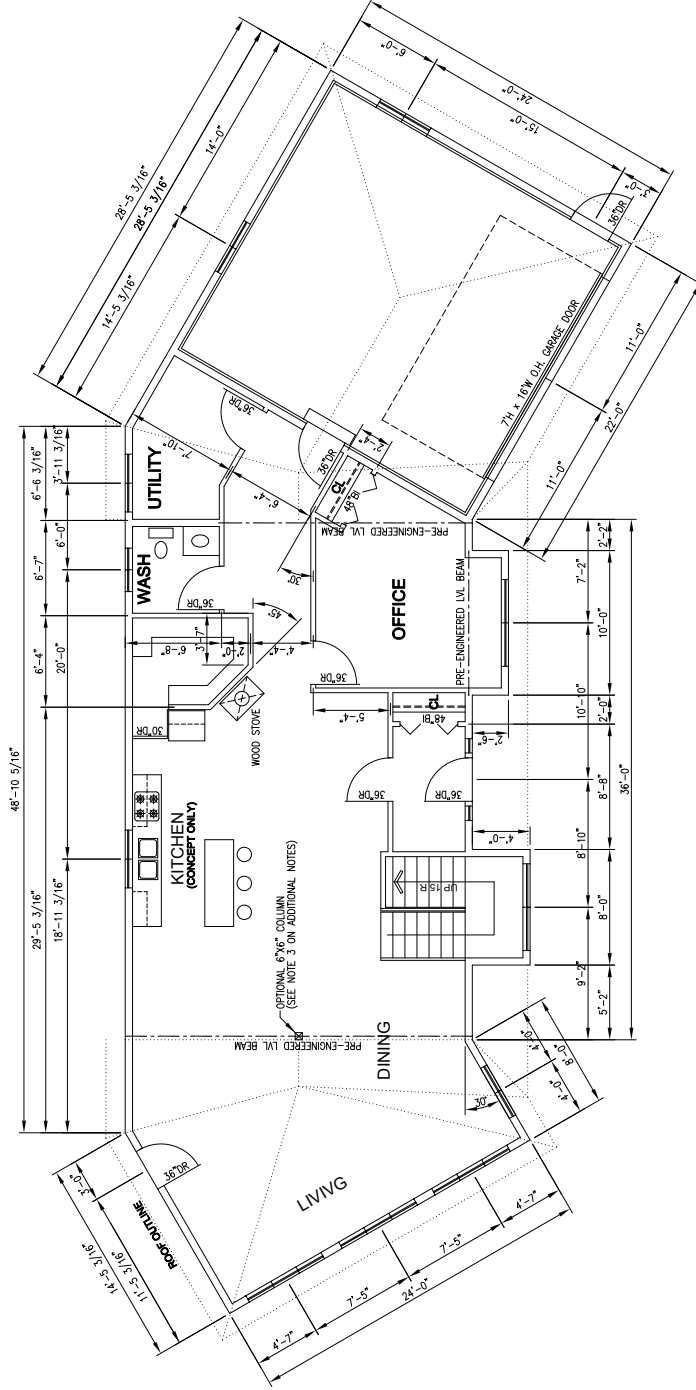

MAIN FLOOR PLAN
 1,422 SQ FEET (EXCLUDING GARAGE)

OWNER:	CHIDEY RESIDENCE
DATE:	DEC. 2016
DRAWN:	SHEET 2 OF 6
CHECKED:	JOB NO.:
APPROVED:	PROJECT NO.:

