
MMILBANK[®]

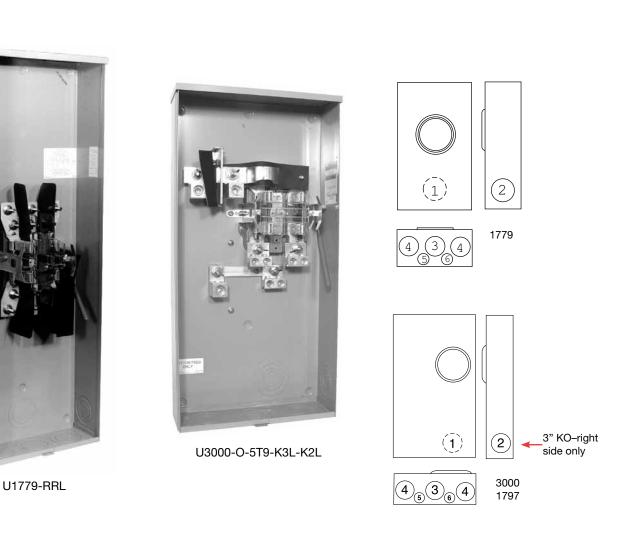

320 AMP CONTINUOUS - 4 & 5 TERMINAL - HEAVY DUTY - RINGLESS - 600 VAC

TERM	SERVICE	CATALOG NUMBER	HUB	CONNECTORS CU/AL		BYPASS	DIMENSIONS			CONCENTRIC KO'S					
				LINE	LOAD	DITASS	D''	ייש	Н''	1	2	3	4	5	6
5	ОН	U1779-RRL-5T9-K3-K2	H.O.	#4-600 (1) 1/0-250 (2)	(2) #6-350	LEVER	47⁄8	13	38¾	3	21/2	3	3	1⁄4	1/4,1/2
5	UG	U3000-0-5T9-K3L-K2L	BLANK	#4-600 (1) 1/0-250 (2)	(2) #6-350	LEVER	47⁄8	15	30	3	3	3	3	1⁄4	1/4,1/2
4	UG	U1797-0-K3L-K2L	BLANK	#4-600 (1) 1/0-250 (2)	TWIN #6-350	LEVER	41/8	15	30	3	3	3	3	1⁄4	1/4,1/2

HUBS: For proper hub selection see the hub suffix chart on the accessory page.

BYPASS: The lever supplies clamping action and also operates bypass device.

FIFTH TERMINAL: For field installed fifth terminal, order as extra K3865.

FACTORY-INSTALLED FIFTH TERMINAL: Includes factory installed fifth terminal in the 9 o'clock position.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment in this catalog.