


KEY

ADDITION WALL ASSEMBLY:
 (OUTSIDE TO INSIDE)
 PTD CEDAR CLAPBOARD
 1x FURRING STRIPS
 2" CONT RIGID FOAM INSUL (R10 MIN)
 WRB+SHEATHING, TAPED AND ROLLED
 2x4 STUDS w/ STONE WOOL CAVITY INSUL
 AIR BARRIER
 PTD GWB

ADDITION FLOOR ASSEMBLY:
 (OUTSIDE TO INSIDE)
 3" FF POLYISO INSUL, TAPED AT SEAMS
 2x10 JOISTS w/ STONE WOOL CAVITY INSUL
 AIR BARRIER (VAPOR PERMEABLE)
 SUBFLOOR
 FINISH FLOORING

CRAWLSPACE FLOOR:
 8" CRUSHED GRAVEL
 20MM VAPOR BARRIER (SEALED TO FND WALLS)

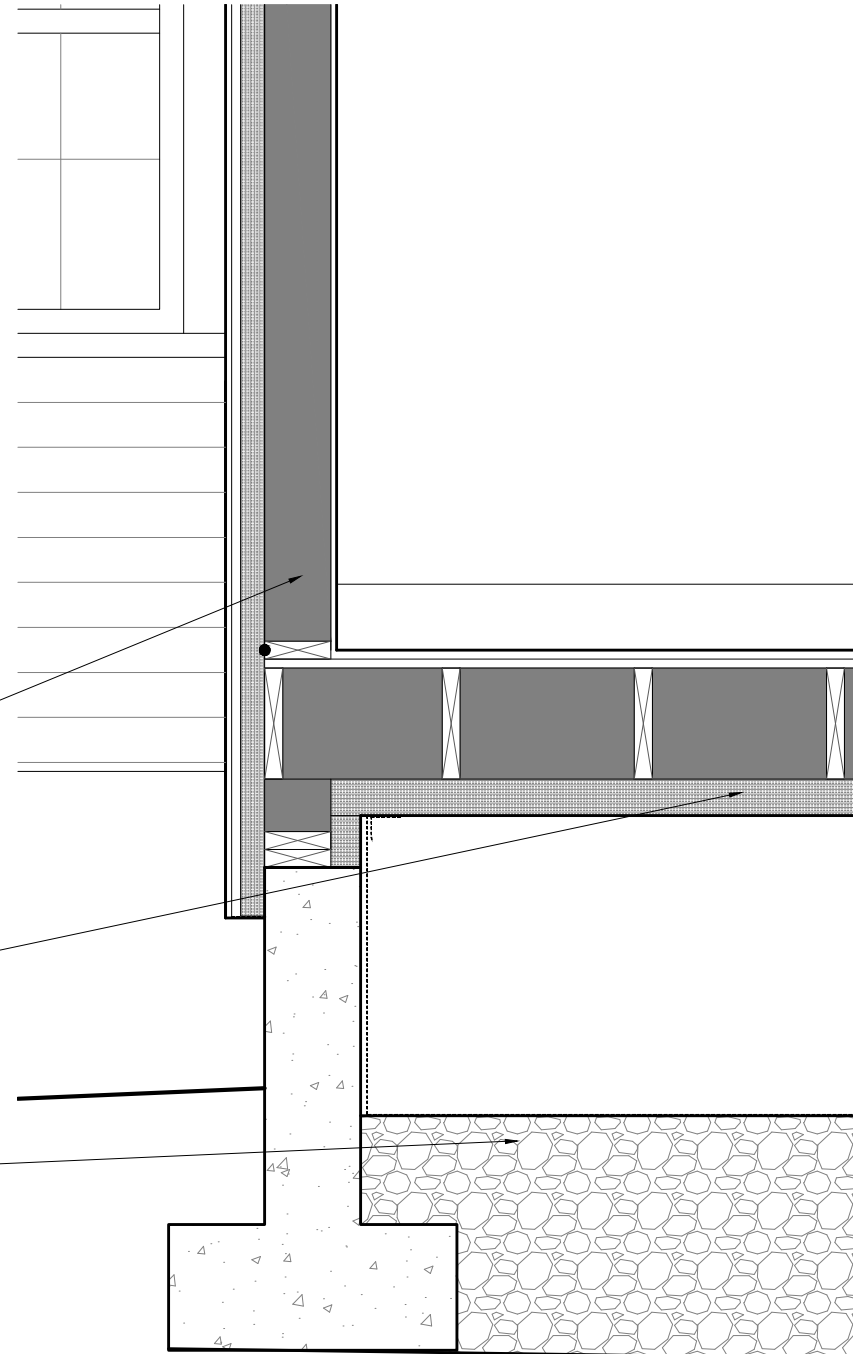

1 TYP WALL SECTION AT FOUNDATION/EXT WALL

1/4" = 1'-0"