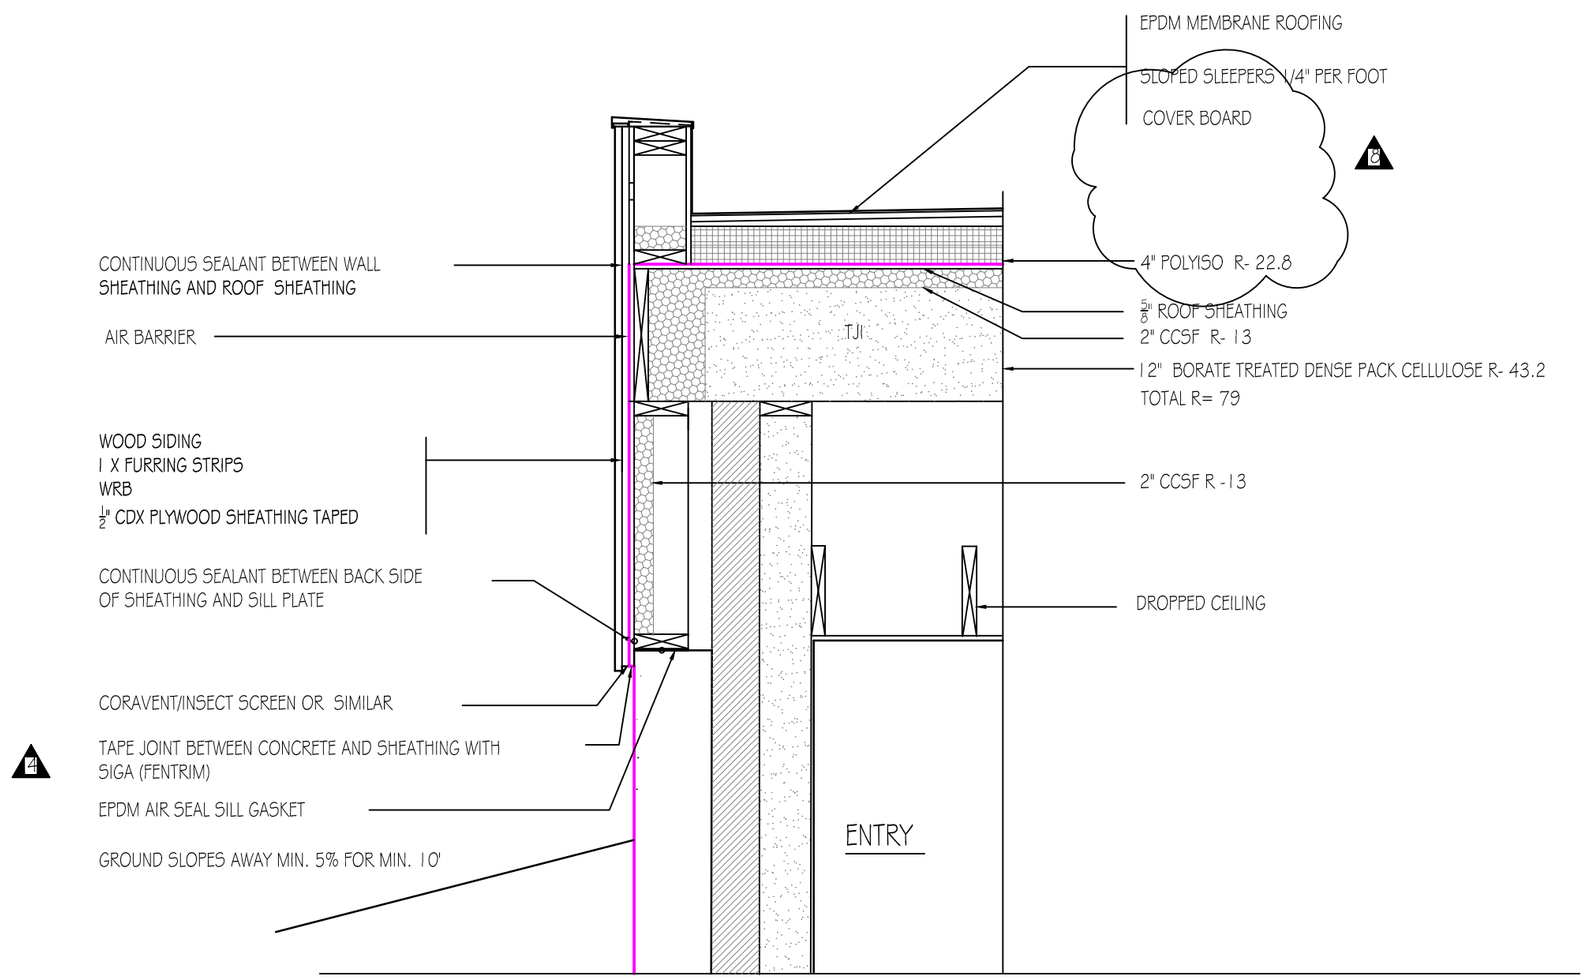
EPDM MEMBRANE ROOFING
SLOPED SLEEPERS 1/4" PER FOOT
COVER BOARD
CONTINUOUS SEALANT BETWEEN WALL
SHEATHING AND ROOF SHEATHING
AIR BARRIER
4" POLYISO R- 22.8
5/8" ROOF SHEATHING
2" CCSF R- 13
TJI
12" BORATE TREATED DENSE PACK CELLULOSE R- 43.2
TOTAL R= 79
WOOD SIDING
1 X FURRING STRIPS
WRB
1/2" CDX PLYWOOD SHEATHING TAPED
2" CCSF R -13
CONTINUOUS SEALANT BETWEEN BACK SIDE
OF SHEATHING AND SILL PLATE
DROPPED CEILING
CORAVENT/INSECT SCREEN OR SIMILAR
TAPE JOINT BETWEEN CONCRETE AND SHEATHING WITH
SIGA (FENTRIM)
EPDM AIR SEAL SILL GASKET
GROUND SLOPES AWAY MIN. 5% FOR MIN. 10'
ENTRY