



The new degree of comfort®



Residential Electric
Professional *Prestige* ProTerra
Hybrid Water Heaters

Professional *Prestige*® ProTerra™ Hybrid Electric with LeakGuard™ is the most efficient water heater available

Efficiency

- Up to 4.0 UEF reduces operating cost
- ENERGY STAR® rated

Performance

- Delivers hot water faster than most standard electric water heaters
- Ambient operating range: 37-145° F is widest in class, offering more days of HP operation annually; designed to meet Northern Climate Spec (Tier 4)

Easy Installation

- Easy access side connections
- Quick access to electrical junction box
- Easily replaces a standard electric water heater

Integration

- LED Screen with built-in water sensor alert with audible alarm¹
- Integrated EcoNet® WiFi-connected² technology and free mobile app gives users control over water heater, allowing for customizable temperature, vacation settings, energy savings and system monitoring at home or away. Visit Rheem.com/hybridsolutions



- Integrated leak detection and prevention system with factory installed auto water shut-off valve limits leaks to no more than 20 ounces of water^{1, 3}
- LeakSense™ Built-in Leak Detection System detects any leak large or small, internal or external^{1, 4}

Operation Modes

- Energy Saver
- Heat Pump
- High Demand
- Electric
- Vacation/Away: 2-28 days (or placed on hold indefinitely)

Plus...

- Premium grade anode rod with resistor extends the life of the tank
- 3/4" NPT water inlet and outlet; 3/4" condensate drain connections
- Incoloy stainless steel resistor elements
- Dry-fire protection
- Easy access, top mounted washable air filter
- 2" Non-CFC foam insulation
- Enhanced flow brass drain valve
- Temperature and pressure relief valve installed
- Design certified to NSF/ANSI 372 (Lead Content)

Warranty

- 10-Year limited tank and parts warranty
See Residential Warranty Certificate for complete information

Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.



Professional *Prestige* ProTerra Hybrid

40, 50, 65 and 80-Gallon Capacities
208-240 Volt / 1 PH Electric



LEED Points = 3

¹Available with select models. ²WiFi broadband internet connection required. ³Source: Rheem Leak-Sensing Data; testing under a vacuum lock using 50-gallon tank, no expansion tank, average tank pressure of 40 psi, assuming no additional faucets are opened. ⁴Water leaks from the heater only, as tested across scenarios including a minimum of 5.5mL/hr volume leak rate, using most common installation scenarios.

See specifications chart on next page.




INTEGRATED HOME COMFORT

Professional *Prestige*® ProTerra Hybrid Specifications

DESCRIPTION					ENERGY INFO		FEATURES								SHIPPING WEIGHTS	
NOMINAL GALLON CAPACITY	RATED GALLON CAPACITY	MODEL NUMBER	MODEL VARIANT	ELECTRIC BREAKER SIZE	UNIFORM ENERGY FACTOR (UEF)	EST. YEARLY ENERGY COST	COMPRESSOR BTU/H	SOUND LEVEL (dBA)	UEF FIRST HR. RATING G.P.H.	RECOVERY IN G.P.H 90° F RISE	ELEMENT WATTAGE	TOTAL UNIT WATTAGE	MAX AMPS	UNIT WT. (LBS)	APPROX. SHIP WT. (LBS.)	
ProTerra with LeakGuard																
40	36	PROPH40 T2 RH375-SO	700646	30	3.75	\$104	4,200	49	60	26	4,500	5,000	21	157	174	
50	45	PROPH50 T2 RH375-SO	700643	30	3.75	\$104	4,200	49	67	27	4,500	5,000	21	178	218	
65	59	PROPH65 T2 RH375-SO	700644	30	3.85	\$155	4,200	49	75	27	4,500	5,000	21	225	262	
80	72	PROPH80 T2 RH375-SO	700645	30	4.00	\$149	4,200	49	87	27	4,500	5,000	21	244	281	
ProTerra 30 Amp without LeakGuard																
40	36	PROPH40 T2 RH375-30	700470	30	3.75	\$104	4,200	49	60	27	4,500	5,000	21	157	174	
50	45	PROPH50 T2 RH375-30	700467	30	3.75	\$104	4,200	49	67	27	4,500	5,000	21	178	218	
65	59	PROPH65 T2 RH375-30	700468	30	3.85	\$155	4,200	49	75	27	4,500	5,000	21	225	262	
80	72	PROPH80 T2 RH375-30	700469	30	4.00	\$149	4,200	49	87	27	4,500	5,000	21	244	281	
ProTerra 15 Amp without LeakGuard																
40	36	PROPH40 T2 RH375-15	700497	15	3.45	\$78	4,200	49	46	16	2,250	2,750	12	157	174	
50	45	PROPH50 T2 RH375-15	700494	15	3.75	\$104	4,200	49	52	16	2,250	2,750	12	178	218	
65	59	PROPH65 T2 RH375-15	700495	15	3.55	\$110	4,200	49	54	16	2,250	2,750	12	225	262	
80	72	PROPH80 T2 RH375-15	700496	15	3.70	\$105	4,200	49	67	16	2,250	2,750	12	244	281	

Estimated energy cost based on a national average electricity cost of \$0.12 /kWh. Uniform Energy Factor and rated gallon capacity based on Department of Energy (DOE) requirements. All units have integrated WiFi control board.

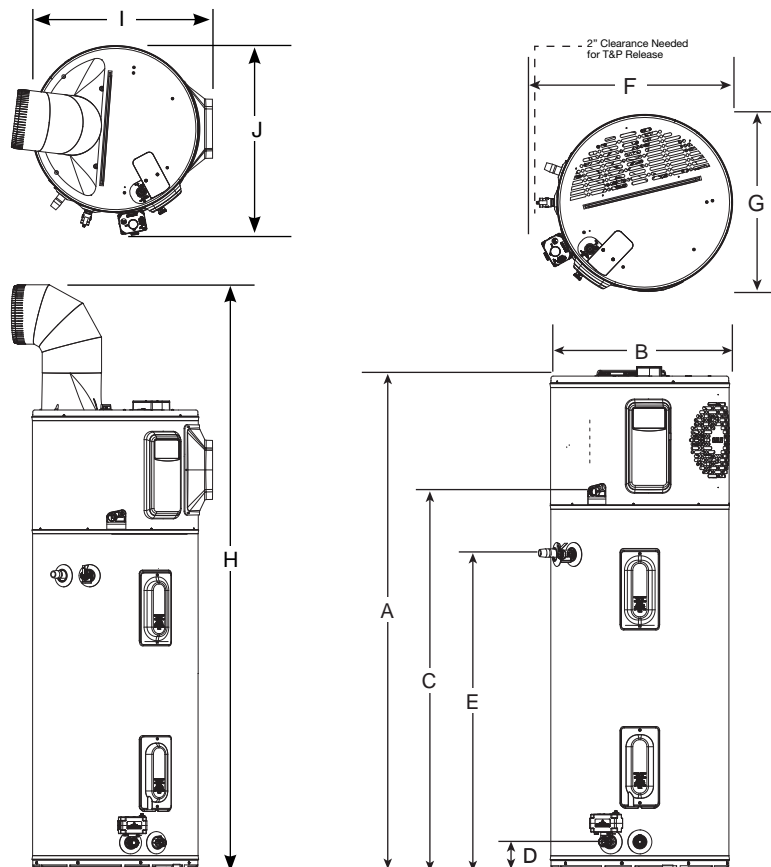

DESCRIPTION		DIMENSIONS (SHOWN IN INCHES)									
NOMINAL GALLON CAPACITY	MODEL NUMBER	A	B	C	D	E	F	G	H	I	J
40	PROPH40	62-5/16	20-1/4	47	3-5/8	39-5/8	23-3/8	20-1/2	78-7/8	22-3/8	23-1/4
50	PROPH50	61-3/4	22-1/4	47	3-5/8	39-5/8	25-3/8	22-1/2	78-5/8	24-3/8	25-9/16
65	PROPH65	64-3/16	24-1/4	49	3-7/8	42-3/8	27-1/2	24-5/8	81-1/8	26-1/2	27-3/8
80	PROPH80	74-3/16	24-1/4	59	3-7/8	42-3/8	27-1/2	24-5/8	91	26-1/2	27-3/8