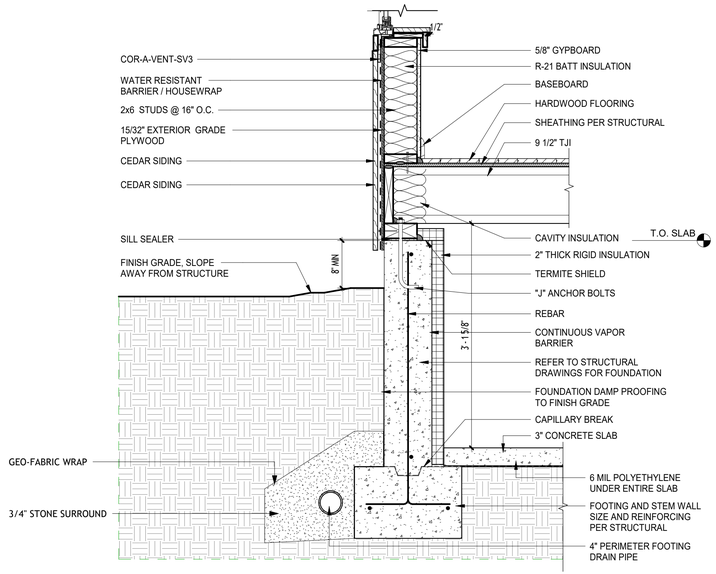
1/2"
COR-A-VENT-SV3
WATER RESISTANT BARRIER / HOUSEWRAP
2x6 STUDS @ 16" O.C.
15/32" EXTERIOR GRADE PLYWOOD
CEDAR SIDING
CEDAR SIDING
SILL SEALER
FINISH GRADE, SLOPE AWAY FROM STRUCTURE
8" MIN
GEO-FABRIC WRAP
3/4" STONE SURROUND
5/8" GYPBOARD
R-21 BATT INSULATION
BASEBOARD
HARDWOOD FLOORING
SHEATHING PER STRUCTURAL
9 1/2" TJI
CAVITY INSULATION
T.O. SLAB
2" THICK RIGID INSULATION
TERMITE SHIELD
"J" ANCHOR BOLTS
REBAR
CONTINUOUS VAPOR BARRIER
7'-1 5/8"
REFER TO STRUCTURAL DRAWINGS FOR FOUNDATION
FOUNDATION DAMP PROOFING TO FINISH GRADE
CAPILLARY BREAK
3" CONCRETE SLAB
6 MIL POLYETHYLENE UNDER ENTIRE SLAB
FOOTING AND STEM WALL SIZE AND REINFORCING PER STRUCTURAL
4" PERIMETER FOOTING DRAIN PIPE